Performance Bulletin


Twin 225hp V6 / Jeanneau Leader 33



| ENGINE | |
|------------------------|-----------------------------------|
| Horsepower | 225 hp 165.5 kw |
| Type & Displacement | EFI 4169 cc |
| Configuration | V6 (60°), 24-valve, DOHC with VCT |
| Weight | 260.0 kg |
| Gear Ratio | 1.75 |
| Mounting Hole Position | 54 mm #3 |
| PROPELLER | |
| Series | Salt Water II |
| Diameter / Pitch | 15 3/4 x 15 |
| Part No. | 6CE-45976-20-00 |



| BOAT SPECIFICATIONS | | |
|----------------------------|---------|--|
| Length | 10.50 m | |
| Beam | 3.32 m | |
| Dry Weight | 4900 kg | |
| Max HP | 500 hp | |
| Fuel Capacity | 520 l | |
| Weight as Tested (approx.) | 7400 kg | |
| | | |

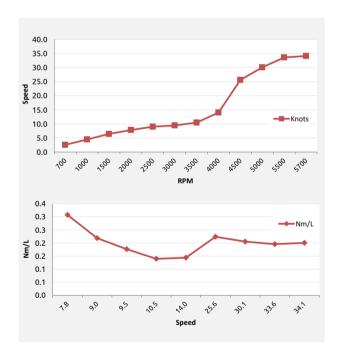

| TEST PERFORMANCE SUMMARY | | |
|---------------------------------------|--------------|------|
| Max Average Speed | 34 kn | |
| Best Cruising Nm/L | 0.2 nm/l | |
| Range (95% fuel capacity & best Nm/L) | 110 nm | |
| Acceleration time | 15.5 sec 0-3 | 25kn |
| | 22.0 sec 0-3 | 30kn |

| PERFORMANCE DATA | | | | | | | | | | | | |
|---|-----|------|------|------|------|------|------|----------|------|------|------|------|
| RPM | 700 | 1000 | 1500 | 2000 | 2500 | 3000 | 3500 | 4000 | 4500 | 5000 | 5500 | 5700 |
| Knots | 2.6 | 4.5 | 6.4 | 7.8 | 9.0 | 9.5 | 10.5 | 14.0 | 25.6 | 30.1 | 33.6 | 34.1 |
| L/h | 1.8 | 2.2 | 2.4 | 3.3 | 4.6 | 5.7 | 7.2 | 7.0 | 4.5 | 4.9 | 5.1 | 5.0 |
| Nm/L | 0.6 | 0.5 | 0.4 | 0.3 | 0.2 | 0.2 | 0.1 | 0.1 | 0.2 | 0.2 | 0.2 | 0.2 |
| FIGURES IN BOLD SHOW OPTIMUM CRUISING AND MAX SPEED | | | | | | | | AX SPEED | | | | |

| TEST CONDITIONS: | Air Temp. 25 | Water Temp. 20 | Wind Velocity 3 n | n/s Type of water: Salt |
|------------------|--------------|----------------|-------------------|-------------------------|
|------------------|--------------|----------------|-------------------|-------------------------|



