

# **Performance Bulletin**





**BOAT MANUFACTURER: FINNMASTER BOAT MODEL: HUSKY R8** OUTBOARD: F300NSBX

**TEST DATE:** 7-9-2022

Finnmaster Boats Oy Finland www.finnmaster.fi


## **FINNMASTER**

#### PERFORMANCE DATA

I ERI ORMANCE DATA			
RPM	Knots	L/Nm	Nm/L
700	2,5	1,0	1,0
1000	5,2	1,0	1,0
1500	6,7	1,3	0,8
2000	9,4	1,6	0,6
2500	15,4	1,3	0,8
3000	23,0	1,1	0,9
3500	28,4	1,1	0,9
4000	33,0	1,4	0,7
4500	37,8	1,5	0,6
5000	42,6	1,8	0,6
5500	47,5	2,0	0,5
5700	48	2.1	0.5

Acceleration time in	n seconds:
----------------------	------------

0-20kn	6,4 s
0-30kn	8,7 s

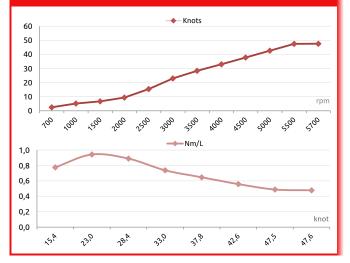

### **FINNMASTER HUSKY R8**

Length	7,60	М
Beam	2,48	М
Dry Weight	1365	Kg
Max HP	300	HP
Fuel Capacity	214	L
Weight as Tested (approx.)	1982	Kg

# F300NSBX

Horsepower	300 Hp	221	Kw
Type & Displacement	EFI	4169	cc
Configuration	V6 (60°), 24-valve, DOF	IC with	n VCT
Weight		280	Kg
Gear Ratio			1,75
Mounting Position	40 mm	/	#3

### **PROPELLER**

Series		Salt Water II		
Diameter / Pitch	15	Х	20	
Partnumber	6CE	6CE-45932-20-0		

### **TEST CONDITIONS**

Crew		2	prs.
Air Temperature		18	°C
Wind Speed		2	m/s
Fuel		214	L
Type of water and temperature	Salt Water	14	°C

### **TEST PERFORMANCE SUMMARY**

Max Average Speed	48	kn
Best Cruising Nm/L	0,9	Nm/l
Range (95% fuel capacity & best Nm/L)	192	Nm

Comment: Tested weigth includes full tank of fuel, 1 battery, safety and test gear

Notice to Consumer: The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as Notice to Consumer: The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upor representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability.

Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase.

Yamaha reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains many of Yamaha's valuable trademarks. It may also contain trademarks belonging to other companies.

Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.